



Driveway, Culvert, and Work Within Right-of-Way Permit

TOWN OF ALGOMA, WINNEBAGO CO. WI, WISCONSIN
15 N Oakwood Road, Oshkosh, WI 54904 | Phone: 920-235-3789

PLEASE PRINT:

Property Owner Name

Phone Number

Address of Driveway, Culvert, or Right-of-Way Work

E-mail Address

PERMISSION IS REQUESTED TO PERFORM THE FOLLOWING WORK IN THE TOWN RIGHT-OF-WAY:

One form is required for each connection/access point.

| | FEE |
|---|----------|
| <input type="checkbox"/> New residential/commercial driveway or field access | \$150.00 |
| <input type="checkbox"/> Existing driveway culvert replacement or extension | \$150.00 |
| <input type="checkbox"/> Hot mix asphalt paving of existing driveway approach <i>(see item #7 of Driveway Approach Permit Guidelines)</i> | \$50.00 |
| Name and phone number of asphalt contractor: _____ | |
| <input type="checkbox"/> Temporary driveway culvert | \$100.00 |
| <input type="checkbox"/> Work in right-of-way* | \$100.00 |

**Attach a description of the proposed work to this application.*

The above fees are non-refundable.

MAKE CHECK PAYABLE TO:

Town of Algoma

RETURN CHECK TO:

15 N Oakwood Rd, Oshkosh, WI 54904

CONTRACTOR OR INDIVIDUAL INSTALLING CULVERT OR PERFORMING WORK IN RIGHT-OF-WAY:

Name

Address

Phone

I understand and agree that submitting this application to the Town of Algoma (also referred to as "the Town") does not imply consent or permission for the described work to occur in the Town Right-of-Way. If approved, the permit will be issued in the name of the **CURRENT PROPERTY OWNER ONLY**.

I will comply with the terms and conditions of any permit issued by the Town of Algoma per the Town of Algoma Ordinances. I have read and understand all the requirements on all pages of this application.

X

Signature (application will **NOT** be processed without signature)

Add a digital signature using Adobe's Fill & Sign/e-signature tool OR print & sign a physical copy.

Date

**See the back of the application for a denial explanation.*

Check #

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Date

SECTION 1: DRIVEWAY APPROACH PERMIT GUIDELINES

1. The side slope grade must be no less than two to one (2:1) as per the diagram (Figure 1-1) below:

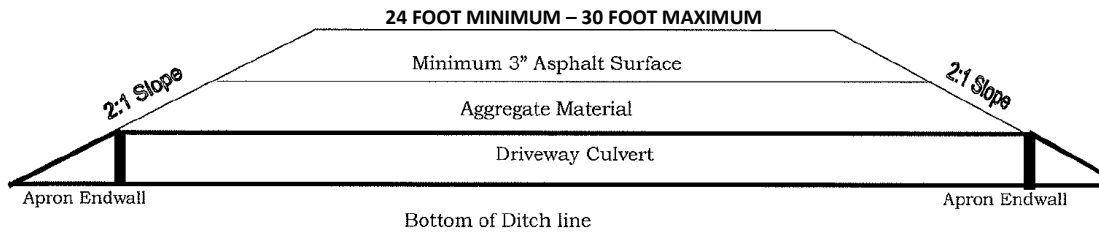


Figure 1-1

2. The property owner or contractor must ensure a minimum of one (1) foot of cover over the culvert. To achieve this, ensure the grade from the top of the garage slab (taken approximately two (2) feet inside the garage) to the top of the culvert is one (1) or more feet in height above the culvert. Make every effort to achieve the maximum cover over the culvert (while noting the minimum amount of cover required is one (1) foot).
3. The driving surface must meet specified width requirements. The minimum width is 24 feet.
4. All finish materials and permit fees are the property owner's expense.
5. **The property owner must complete all other finish work within 90 days of the culvert installation; this includes surfacing the driveway approach with asphalt.** The Town of Algoma reserves the right to inspect and correct unaddressed deficiencies after the 90-day inspection period and have all associated costs charged to the property owner. If requested, the Road/Drainage Coordinator, Building Inspector, Administrator, or their designee may grant time extensions at their discretion.
6. Surface the portion of the driveway portion located in the right-of-way with asphalt. The use of concrete or brick pavers is prohibited.
7. Taper the HMA (hot mix asphalt) so water diverts into the roadway ditch. Runoff from the paved driveway cannot drain onto the adjoining road. Keep driveway approach elevations below the adjoining roadway pavement to avoid obstructions for snow removal equipment. The low point of the driveway must be over the culvert or transverse to the center of the ditch.
8. Temporary driveways may be allowed with approval from the Road/Drainage Coordinator, Building Inspector, Administrator, or their designee.
9. The property owner is responsible for the expense of removing any unauthorized installations. The property owner is then required to apply for and pay all necessary fees to obtain an approved Town of Algoma Driveway Permit before installation of the HMA.
10. The Town of Algoma Road/Drainage Coordinator, Building Inspector, Administrator, or their designee will approve all work. If the work does not meet Town of Algoma specifications, the property owner is required to make changes or repairs. If the property owner does not make the required changes or repairs within 60 days, the Town is authorized to hire a third party to complete the necessary work. The Town will bill the property owner for all work performed by the third party. The property owner has 45 days from the billing date to reimburse the Town of Algoma. The Town will add any past-due balances to the property owner's real estate taxes.
11. The property owner or contractor must contact Digger's Hotline and any other private utilities before the commencement of work.

SECTION 2: DRIVEWAY CULVERT INSTALLATION GUIDELINES

1. The side slope grade must be no less than two to one (2:1) as per the diagram (Figure 2-1) below:

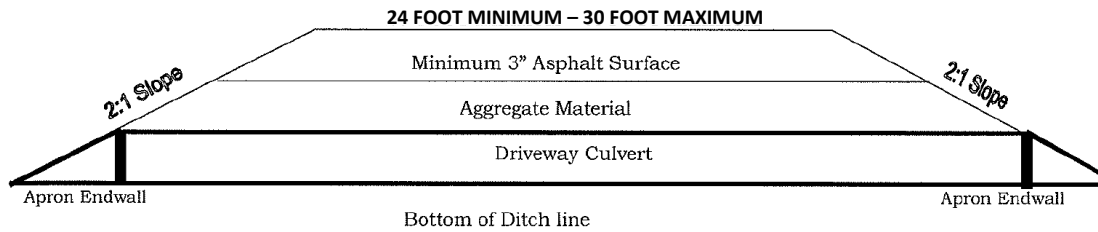


Figure 2-1

2. To obtain a permit, submit a site plan of the proposed building and building site to the Town of Algoma. The site plan must include four (4) views of the building elevations (front, back, and sides).
3. The culvert must be at a right angle to the roadway and located at the bottom of the existing ditch line. Some excavation may be needed to achieve the proper elevation and flow line.
4. The property owner or contractor must identify the desired driveway location by placing stakes in the ditch of the right-of-way. The Town Road/Drainage Coordinator, Building Inspector, Administrator, or their designee will then determine the size of the culvert.
5. The property owner or contractor must ensure a minimum of one (1) foot of cover over the culvert. To achieve this, ensure the grade from the top of the garage slab (taken approximately two (2) feet inside the garage) to the top of the culvert is one (1) or more feet in height above the culvert. Make every effort to achieve the maximum cover over the culvert (while noting the minimum amount of cover required is one (1) foot).
6. The driveway culvert must meet Town of Algoma specifications. The minimum width is 24 feet. The required length of the culvert with end walls is at the discretion of the Town of Algoma Road/Drainage Coordinator, Building Inspector, Administrator, or their designee.
7. The driveway culvert must meet Town of Algoma specifications. The culvert diameter must be a minimum of 15 inches, and all installations require end walls on both ends of the culvert pipe. End walls are to be installed during the original installation.
8. Culvert pipes and end walls can consist only of galvanized steel material. Culverts constructed of plastic, vinyl, or polyvinyl materials are prohibited except for an approved temporary installation.
9. All culverts, end walls, finish materials, installation, and permit fees are at the property owner's expense.
10. Install all culverts and end walls within 90 days of the permit issuance date.
11. **The property owner must complete all other finish work within 90 days of the culvert installation; this includes surfacing the driveway approach with asphalt.** The Town of Algoma reserves the right to inspect and correct unaddressed deficiencies after the 90-day inspection period and have all associated costs charged to the property owner. If requested, the Road/Drainage Coordinator, Building Inspector, Administrator, or their designee may grant time extensions at their discretion.
12. Temporary culverts may be allowed with approval from the Road/Drainage Coordinator, Building Inspector, Administrator, or their designee.
13. The property owner is responsible for the expense of removing any temporary culverts.

SECTION 2: DRIVEWAY CULVERT INSTALLATION GUIDELINES CONT.

14. The property owner or contractor must contact Digger's Hotline and any other private utilities before the commencement of work.
15. The property owner is responsible for the expense of removing any unauthorized installations. The property owner is then required to apply for and pay all necessary fees to obtain a Town of Algoma Driveway Permit before installing an approved culvert.
16. Only one (1) access is allowed per residential parcel.
17. The Town of Algoma Road/Drainage Coordinator, Building Inspector, Administrator, or their designee will approve all work. If the work does not meet Town of Algoma specifications, the property owner is required to make changes or repairs. If the property owner does not make the required changes or repairs within 60 days, the Town is authorized to hire a third party to complete the necessary work. The Town will bill the property owner for all work performed by the third party. The property owner has 45 days from the billing date to reimburse the Town of Algoma. The Town will add any past-due balances to the property owner's real estate taxes.

SECTION 3: PERMIT FOR WORK WITHIN RIGHT-OF-WAY GUIDELINES

1. The applicant is responsible for the expense of removing any unauthorized installations.
2. The Town of Algoma Road/Drainage Coordinator, Building Inspector, Administrator, or their designee will approve all work. If the work does not meet Town of Algoma specifications, the property owner is required to make changes or repairs. If the property owner does not make the required changes or repairs within 60 days, the Town is authorized to hire a third party to complete the necessary work. The Town will bill the property owner for all work performed by the third party. The property owner has 45 days from the billing date to reimburse the Town of Algoma. The Town will add any past-due balances to the property owner's real estate taxes.
3. The property owner or contractor must contact Digger's Hotline and/or any other private utilities before the commencement of work.

SECTION 4: PERMIT CONDITIONS

Failure to comply with any of the below conditions will result in a work stoppage mandated by the Town Administrator or designee.

1. Dispose of all on-site waste and concrete wash properly.
2. Clean up road surfaces and all sediment carried off-site by the end of the workday.
3. Ditch checks are required.
4. Drainage from the site must not impact neighboring properties.
5. Establish vegetation as soon as possible and maintain erosion control practices until it is established.
6. Locate soil stockpiles on high ground, away from drainage, water courses, inlets, etc.
7. Minimize land disturbance.
8. Seed and mulch disturbed areas.
9. Establish property lines of new and abutting properties.
10. Perimeter controls are required.
11. Protect soil stockpiles with seed, mulch, silt fence, tarps, trenches, etc.
12. A tracking pad is required (minimum 24' x 50' x 1' of 3-6" clear stone).
13. Culvert and asphalt aprons must comply with the requirements outlined in this document.
14. Access property through approved entrances only; do not disturb finished ditches.
15. Grade yards to proper grades OR provide yard grade information to owners.
16. Place mailboxes according to USPS requirements.
17. Overnight (midnight – 6:00 a.m.) parking is prohibited on ALL Town of Algoma roadways; this includes motor vehicles, other large vehicles, and trailers. See Town of Algoma Municipal Code § 320-15(E).